





R134A $T_0 = +5 \div -15^\circ\text{C}$

ELECTROLUX
compressors

Predisposto per ESPANSIONE A **VALVOLA TERMOSTATICA** Equipped for EXPANSION BY MEANS OF **THERMAL EXPANSION VALVE**
Ausgerüstet für EXPANSION MIT **THERMOSTATISCHES EXPANSIONVENTIL** Predispuestas para EXPANSION CON **VALVULA TERMOSTATICA**
Prédisposées pour DETENTE PAR **DETENDEUR THERMOSTATIQUE** Подготовленные для ДРОССЕЛИРОВАНИЯ ХЛАДАГЕНТА ЧЕРЕЗ **ТЕРМОРЕГУЛИРУЮЩИЙ ВЕНТИЛЬ**

Modello Model Modell Modelo Modèle Модель	Compressore Compressor Verdichter Compresor Compresseur Компрессор	Cilindrata Displacement Hubvolumen Desplazamiento Volume balayé Подача	Tensione Voltage Spannung Tensión Tension Напряжение	Potenza Frigorifera (W) Refrigerating capacity Kälteleistung Potencia frigorífica Puissance frigorifique Холодильная мощность					Dimensioni (mm) Dimensions Abmessungen Dimensiones Dimensions Размеры			Peso netto Net weight Nettogewicht Peso neto Poids net Вес Нетто	Ø Aspirazione Suction line Saugleitung Línea de aspiración Aspiration Линия всасывания		Ø Mandata Discharge line Druckleitung Línea de descarga Refoulement Линия нагнетания			
A		HP	cm³	V/ph/Hz	T ₀ ⁺ +5°C	T ₀ ⁺ 0°C	T ₀ ⁺ -5°C	T ₀ ⁺ -10°C	T ₀ ⁺ -15°C	L	P	H	kg	mm	inch	mm	inch	
	L 1 E 05 230 1 V	GL45TB	1/6	4,60	230 /1 /50	404	343	278	226	182	340	500	270	17	10	3/8	6	1/4
	L 1 E 06 230 1 V	GL60TB	1/5	5,70	230 /1 /50	527	447	362	294	237	340	500	270	17	10	3/8	6	1/4
	L 1 E 08 230 1 V	GL80TB	1/5	7,60	230 /1 /50	663	552	449	355	273	340	500	270	17	10	3/8	6	1/4
	L 1 E 09 230 1 V	GL90TB	1/4	8,80	230 /1 /50	722	605	498	403	324	340	500	270	18	10	3/8	6	1/4
	L 1 E 12 230 1 V	GP12TB	1/3	12,00	230 /1 /50	961	802	656	526	417	340	500	270	18	10	3/8	6	1/4
	L 1 E 14 230 1 V	GP14TB	3/8	14,00	230 /1 /50	1121	935	765	614	486	340	500	270	18	10	3/8	6	1/4
	L 1 E 16 254 1 V	GP16TB	3/8	16,00	230 /1 /50	1244	1047	862	698	559	340	500	295	20	10	3/8	6	1/4
	L 1 E 18 254 1 V	GX18TB	1/2	18,39	230 /1 /50	1358	1143	941	762	610	340	500	295	20	10	3/8	6	1/4
	L 1 E 23 254 1 V	GX23TB	5/8	23,20	230 /1 /50	1464	1236	1018	814	635	340	500	295	20	12	1/2	10	3/8
B	L 1 E 26 300 1 V	GS26TB	3/4	25,93	230 /1 /50	2076	1719	1383	1073	784	420	610	370	28	12	1/2	10	3/8
	L 1 E 30 300 1 V	GS30TB	7/8	29,95	230 /1 /50	2542	2114	1720	1364	1061	420	610	370	29	12	1/2	10	3/8
	L 1 E 34 350 1 V	GS34TB	1	34,42	230 /1 /50	2922	2430	1977	1568	1219	480	610	420	29	12	1/2	10	3/8
	L 1 E 26 254 2 V	GS26TB	3/4	25,93	230 /1 /50	2076	1719	1383	1073	784	660	560	370	31	12	1/2	10	3/8
	L 1 E 30 254 2 V	GS30TB	7/8	29,95	230 /1 /50	2542	2114	1720	1364	1061	660	560	370	32	12	1/2	10	3/8
	L 1 E 34 300 2 V	GS34TB	1	34,42	230 /1 /50	2922	2430	1977	1568	1219	780	560	420	33	12	1/2	10	3/8

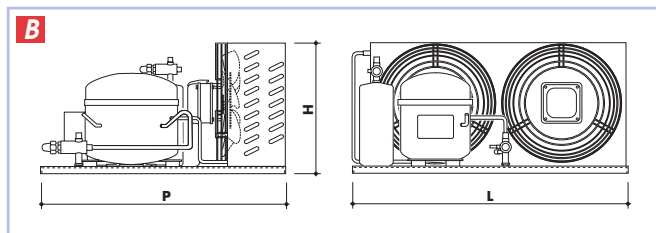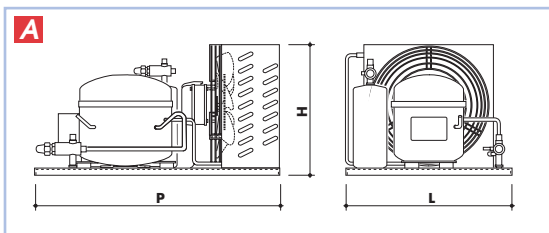



R134A $T_0 = +5 \div -15^\circ\text{C}$



ELECTROLUX
compressors

Predisposto per ESPANSIONE A **CAPILLARE** Equipped for EXPANSION BY MEANS OF **CAPILLARY TUBE**

Ausgerüstet für EXPANSION MIT **KAPILLARE** Predispuestas para EXPANSION CON **TUBO CAPILAR**

Prédisposées pour DETENTE PAR **CAPILLAIRE** Подготовленные для ДРОСЕЛИРОВАНИЯ ХЛАДАГЕНТА ЧЕРЕЗ **КАПИЛЛЯРНУЮ ТРУБКУ**

Modello Model Modell Modelo Modèle Модель	Compressore Compressor Verdichter Compresor Compresseur Компрессор	Cilindrata Displacement Hubvolumen Desplazamiento Volume balayé Подача	Tensione Voltage Spannung Tensión Tension Напряжение	Potenza Frigorifera (W) Refrigerating capacity Kälteleistung Potencia frigorífica Puissance frigorifique Холодильная мощность					Dimensioni (mm) Dimensions Abmessungen Dimensiones Dimensions Размеры			Peso netto Net weight Nettogewicht Peso neto Poids net Вес Нетто	Ø Aspirazione Suction line Saugleitung Línea de aspiración Aspiration Линия всасывания		Ø Mandata Discharge line Druckleitung Línea de descarga Refolement Линия нагнетания		
A		HP	cm³	V/ph/Hz	T ₀ ⁺ +5°C	T ₀ ⁺ 0°C	T ₀ ⁺ -5°C	T ₀ ⁺ -10°C	T ₀ ⁺ -15°C	L	P	H	kg	mm	inch	mm	inch
	L 1 E 05 230 1 C	GL45TB 1/6	4,60	230 /1 /50	404	343	278	226	182	340	500	270	17	8	5/16	6	1/4
	L 1 E 06 230 1 C	GL60TB 1/5	5,70	230 /1 /50	527	447	362	294	237	340	500	270	17	8	5/16	6	1/4
	L 1 E 08 230 1 C	GL80TB 1/5	7,60	230 /1 /50	663	552	449	355	273	340	500	270	17	8	5/16	6	1/4
	L 1 E 09 230 1 C	GL90TB 1/4	8,80	230 /1 /50	722	605	498	403	324	340	500	270	18	8	5/16	6	1/4
	L 1 E 12 230 1 C	GP12TB 1/3	12,00	230 /1 /50	961	802	656	526	417	340	500	270	18	8	5/16	6	1/4
	L 1 E 14 230 1 C	GP14TB 3/8	14,00	230 /1 /50	1121	935	765	614	486	340	500	295	18	8	5/16	6	1/4
	L 1 E 16 254 1 C	GP16TB 3/8	16,00	230 /1 /50	1244	1047	862	698	559	340	500	295	20	8	5/16	6	1/4
	L 1 E 18 254 1 C	GX18TB 1/2	18,39	230 /1 /50	1358	1143	941	762	610	340	500	295	20	8	5/16	6	1/4
	L 1 E 23 254 1 C	GX23TB 5/8	23,20	230 /1 /50	1464	1236	1018	814	635	340	500	295	20	12	1/2	10	3/8
B	L 1 E 26 300 1 C	GS26TB 3/4	25,93	230 /1 /50	2076	1719	1383	1073	784	420	610	370	28	12	1/2	10	3/8
	L 1 E 30 300 1 C	GS30TB 7/8	29,65	230 /1 /50	2542	2114	1720	1364	1061	420	610	370	29	12	1/2	10	3/8
	L 1 E 34 350 1 C	GS34TB 1	34,42	230 /1 /50	2922	2430	1977	1568	1219	480	610	420	33	12	1/2	10	3/8
	L 1 E 26 254 2 C	GS26TB 3/4	25,93	230 /1 /50	2076	1719	1383	1073	784	660	560	370	35	12	1/2	10	3/8
	L 1 E 30 254 2 C	GS30TB 7/8	29,95	230 /1 /50	2542	2114	1720	1364	1061	660	560	370	35	12	1/2	10	3/8
	L 1 E 34 300 2 C	GS34TB 1	34,42	230 /1 /50	2922	2430	1977	1568	1219	780	560	420	37	12	1/2	10	3/8

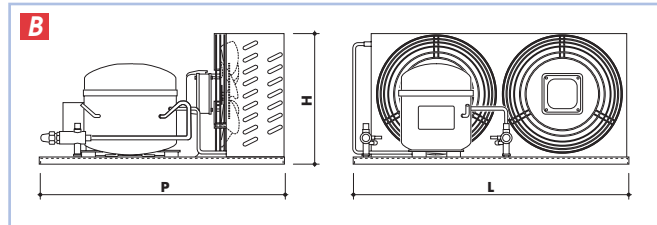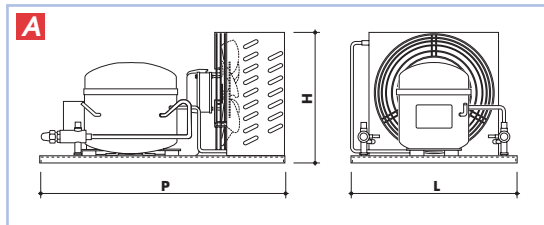

LEGENDA CODICE MODELLO UNITÀ UNITS MODEL CODE DESCRIPTION BESCHREIBUNG DES MODELLCODES VERFLÜSSIGUNGSSÄTZE

DESCRIPCION CODIGO MODELO UNIDADES DESCRIPTION CODE MODÈLE UNITÉS ОБОЗНАЧЕНИЕ МОДЕЛИ КОНДЕНСАТОРНЫЕ БЛОКИ

A	B	C	D	E	F	G
L	1	E	0 4	2 3 0	1	V

A = Gamma e gas (N= TN R404A / K= BT R404A / M= TN R22 / L= TN R134A) • Temperature range and Refrigerant (N= MT R404A / K= LT R404A / M= MT R22 / L= MT R134A)
Temperaturbereich und Kältemittel (N= NK R404A / K= TK R404A / M= NK R22 / L= NK R134A) • Gama de temperatura y Refrigerante (N= TN R404A / K= BT R404A / M= TN R22 / L= TN R134A)
Gamme de température et frigorigène (N= TN R404A / K= BT R404A / M= TN R22 / L= TN R134A)
Температурный диапазон и хладагент (N= средняя темп. R404A / K= низкая темп. R404A / M= средняя темп. R22 / L= средняя темп. R134A)

B = Tensione di alimentazione • Power supply • Spannung • Tensión de alimentación • Tension d'alimentation • Напряжение питания (230/1/50 - 400/3/50)

C = Marca compressore • Compressor make • Verdichter-Fabrikat • Marca compresor • Marque compresseur • Марка компрессора: A= ASPERA / E= ELECTROLUX / T= TECUMSEH

D = Cilindrata compressore • Compressor displacement • Verdichter-Hubvolumen • Desplazamiento compresor • Volume balayé compresseur • Поддача компрессора (cm³)

E = Ø ventole • Fan Ø • Ventilatoren Ø • Ø Ventiladores • Ø Ventilateurs • Ø Вентиляторов

F = n° ventole condensatore • No. of condenser fans • Zahl der Verflüssigerventilatoren • No. ventiladores condensador • Nombre ventilateurs condenseur • Вентиляторы конденсатора

G = V= Valvola termostatica • Thermal expansion valve • Thermostatisches Expansionsventil • Válvula termostatica • Détendeur thermostatique • Терморегулирующий вентиль

C= Tubo capillare • Capillary tube • Kapillare • Tubo capilar • Capillaire • Капиллярную трубку